


Overview

Designed with high performance and low loss, this TAM is easily connected into any existing configuration or new installation. Using industry standard IDC connectors for faster fitting and reduced installation costs. UTEL can also supply a custom made rack capable of holding 18 Tasm units and the controller. All daisy chain cables are provided pre-cut to the right lengths and RJ45 terminated.

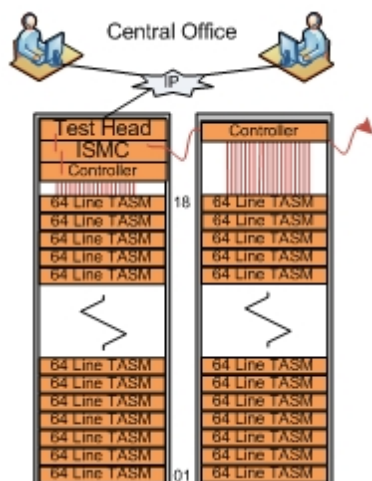

Colour coding of all cables ensures they are easily identified and connected in the right order.

Cable management is designed into the rack, four separate channels exist for easy cable routing and installation.

The rack can be partially populated and expanded as the customer base expands with additional racks being added later. The minimum number of test circuits in this configuration is 64.

Daisy chain up to 36864 lines with an ISMC 32ES-EU or 147456 with the ISMC 128ES-EU

Key Benefits

- Low cost solution at install time or as a retrofit option
- Automated testing after floods, storms or weather disasters
- Defined interfaces and APIs available free of charge
- Expandable / Scalable solution for later growth
- Self contained Rack unit



Key Features

- Fault tolerant - lines switched through by default
- No power consumption in idle mode
- Real Time test access and testing
- Industry Standard IDC connectors
- Dedicated rack housing

Product Data

- 64 Switchable test circuit pairs per shelf
- Rack: Height: 2m Width: 600mm Depth: tba Weight: 25KG
- Shelf: Height: 100mm Width: 600mm Depth: 110mm
- Four wire test bus - look in & look out test options
- Real Time circuit access, test and diagnostics
- Works with all leading manufactures Test Heads
- No power consumption in idle mode
- Cable management built into the rack sides
- Industry standard 25 pair AMP Champ connectors
- Fully compliant with EMC, ESD, CE and RoHS standards

