


Overview

The in-line modular TAMs are designed to plug straight into the DSLAM and have male and female connectors. On new installations, the module is plugged and secured to the DSLAM and the original cable is plugged into the modular TAM. Retrofit takes a few hours, the cable is removed from the DSLAM, the modular TAM inserted and the cable reconnected.

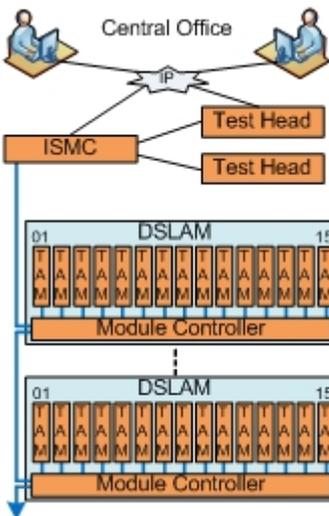

This is the cheapest option for in-line TAM, no additional cables, no extra cabinets, they simple fit into the existing DSLAM rack.

Partial installations are also possible, adding additional modules as the customer base expands.

The installation teams will be provided with all the tools required to carry out a retrofit installation.

Daisy chain up to 30720 lines with an ISMC 32ES-EU or 122880 with the ISMC 128ES-EU

Key Benefits

- Low cost solution at install time or as a retrofit option
- No additional cables or cable costs
- Automated testing after floods, storms or weather disasters
- Reduced truck roll by accurate fault diagnosis
- Reduced OpEX, more efficient use of deskilled staff



Key Features

- Modular design, no additional racks or footprint
- No power consumption in idle mode
- True four wire test - 2 in, 2 out
- Fault tolerant - lines switched through by default
- EMC, ESD, RoHS, CE compliant

Product data

- 64 Switchable test circuit pairs per module
- Height: 335mm Width: 25mm Depth: 130mm Weight: 480g
- Four wire test bus - look in & look out test options
- Real Time circuit access, test and diagnostics
- Fault tolerant - lines switched through in default
- Free API & XML interface for customer control system
- Fitted directly to DSLAM - No additional tacks or cabling
- RJ45 Cat 5 cables provided for easy interconnect
- Works with all leading manufacturers Test Heads
- Fully compliant with EMC, ESD, CE and RoHS standards

