
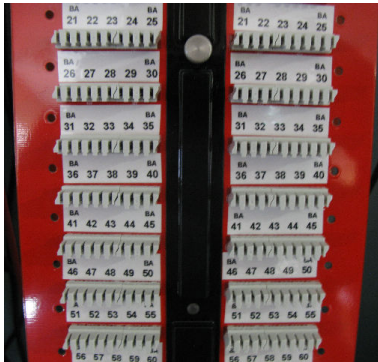


Overview

Designed with high performance and low loss, this TAM is easily connected into any existing configuration or new installation. Using industry standard IDC connectors for faster wire termination and reduced installation costs. UTEL can also supply a custom made rack capable of holding 12 Tasm units and the controller. All daisy chain cables are provided pre-cut to the right lengths and RJ45 terminated.



Cable management is designed into the rack with the cable entry along the top of the cabinet. Cables are fed down into the rack and tied to the cross bars with cable ties.

The rack can be partially populated and expanded as the customer base expands with additional racks being added later. The minimum number of test circuits in this configuration is 128.

Key Benefits

- Low cost solution at install time or as a retrofit option
- Automated testing after floods, storms or weather disasters
- Defined interfaces and APIs available free of charge
- Expandable / Scalable solution for later growth
- Self contained Rack unit

Key Features

- Fault tolerant - lines switched through by default
- No power consumption in idle mode
- Real Time test access and testing
- Industry Standard IDC connectors
- Dedicated rack housing

Product Data

- 128 Switchable test circuit pairs per shelf
- Rack: Height: 2m Width: 600mm Depth: tba Weight: 25KG
- Shelf: Height: 100mm Width: 600mm Depth: 110mm
- Four wire test bus - look in & look out test options
- Real Time circuit access, test and diagnostics
- Works with all leading manufactures Test Heads
- No power consumption in idle mode
- Cable management built into the rack sides
- Industry standard IDC Connectors
- Fully compliant with EMC, ESD, CE and RoHS standards

